


## F-Splice

### F81B Series (Short)

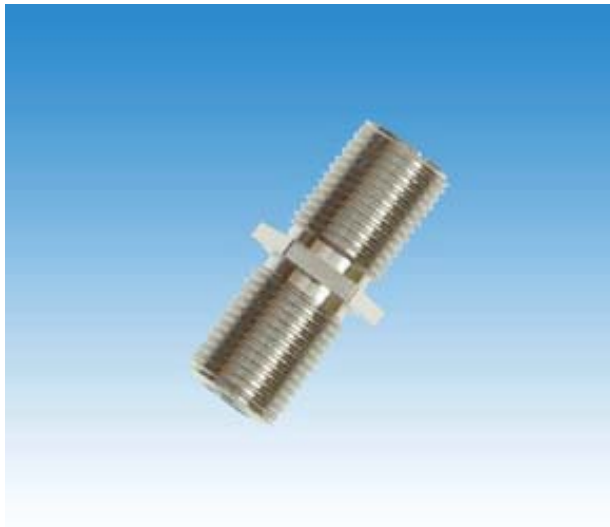

### Overview

Antronix's high performance F-splice is made of high quality machined brass F-ports and nickel plated to resist corrosion. Our F81B splice features our Eclipse Contact Technology seizure pin for optimal contact area.

The high performance A7B Series ground block uses Antronix's Eclipse Contact Technology (ECT). The ECT grips the center conductor around its circumference providing at least 400% more center conductor coverage than traditional F-ports.

### Specifications

Insertion Loss			
	Freq. (MHz)	Maximum (dB)	Typical (dB)
	5-15	0.10	0.05
	15-40	0.10	0.05
	40-200	0.10	0.05
	200-550	0.10	0.05
	550-750	0.10	0.05
	750-1000	0.10	0.05

Return Loss			
	Freq. (MHz)	Minimum (dB)	Typical (dB)
	5-15	40	50
	15-40	35	40
	40-200	28	35
	200-550	28	35
	550-750	25	30
	750-1000	25	30

Specifications subject to change without notice